


**EZDown Instruction
1st Fitment**

MITSUBISHI ED0195


1

RHS and LHS are determined when sitting in the Drivers side of the Vehicle.

2

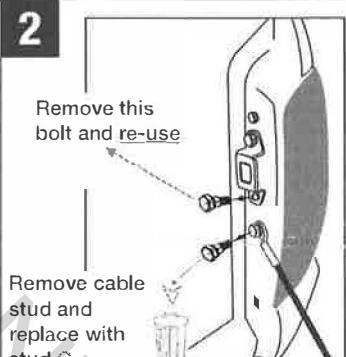

3

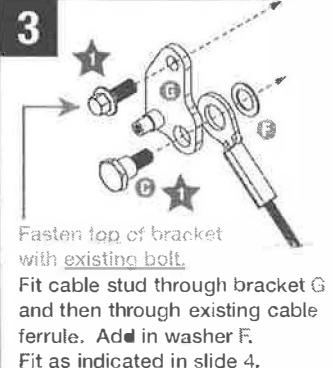


4

Bracket to be bolted against vehicle as shown


Ensure cable has movement and can swivel

Vehicles own cable now used, not our cable


5

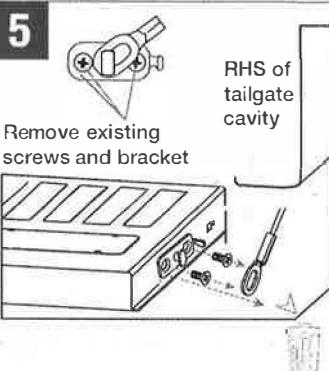

6

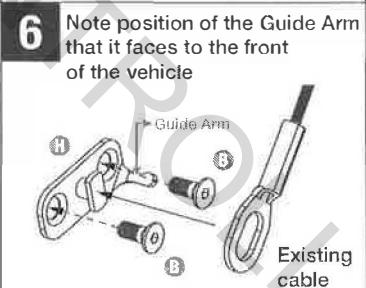


7

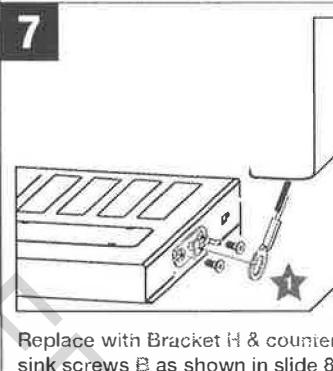


8

Hook existing cable onto bracket H by slightly lifting the tailgate flap

9

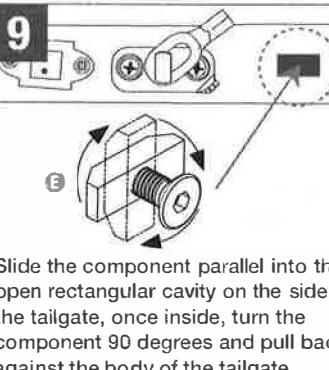


10

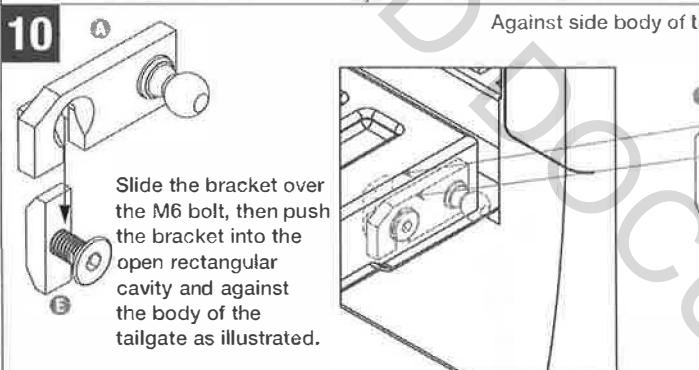


Against side body of tailgate

A Make sure the clamping nut E locates between legs and the bracket and does not rotate.


11



12




13

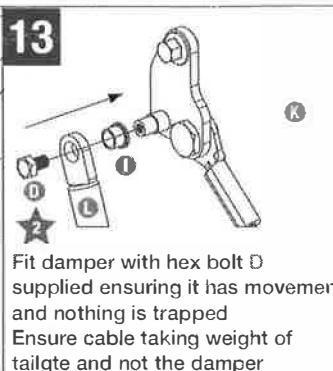

14

Fit damper as per slide 13.

Ensure cables are free and flowing



FITTING CODE	MANUFACTURER	MODEL TYPE	YEAR	STOCKIST	PRODUCT	REVISION	LABOUR	DATE	PAGE
ED0195	MITSUBISHI	TRITON	2017+	DEALERSHIPS	EZDOWN	3	20min	19/06/2019	1
TORQUE – N.m	★	27N.m±2N.m	★	15N.m±2N.m				www.ezdown.co.za	

NB: After installation please close tailgate gently to ensure that there is no interference with any hardware.

IMPORTANT:

No liability will be incurred by Industrial Specialised Applications company, for injury, death, or property damage caused by a product which has been set up, operated, and/or installed contrary to EZDown installation guidelines, or which has been subjected to misuse, negligence, or accident, or which has been repaired or altered by anyone other than Industrial Specialised Applications, or which has been used in a manner or for a purpose for which the product was not designed.

