


The safest way to lift a tailgate
















A ED0052 17mm Hex Head/ torque wrench	B ED0056 17mm Hex Head/ torque wrench	C ED0054 17mm Hex Head/ torque wrench	K
D ED0007	E ED0308	F 8442LT	G ED0059 10mm Spanner

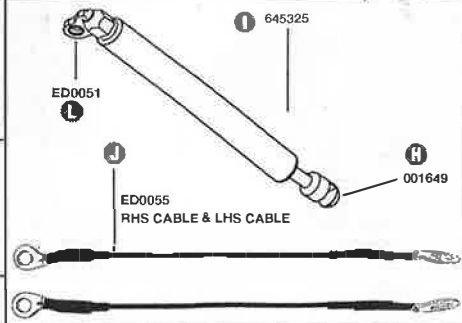

EZDown Reloaded Instruction - 1st Fitment

EZDown Reloaded Hilux/Revo 2016 - RL0050

1
RHS and LHS are determined when sitting in the Drivers side of the Vehicle.
NB: Locktite all fixing/mounting points where applicable.
After full fitment remove labels from the cables.

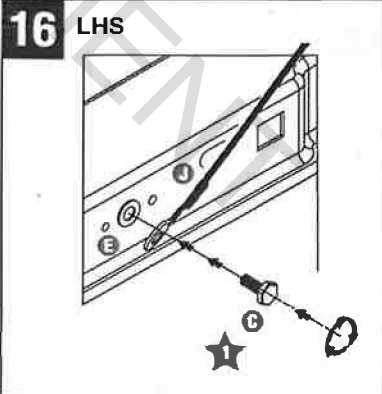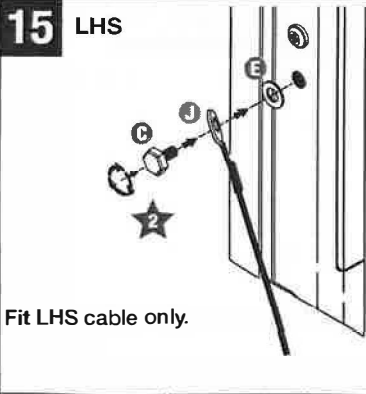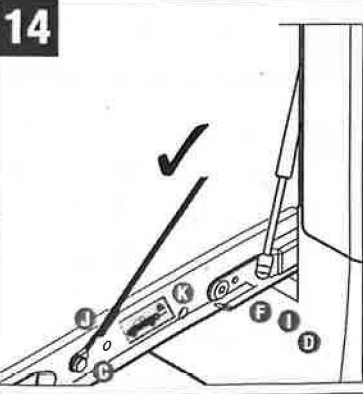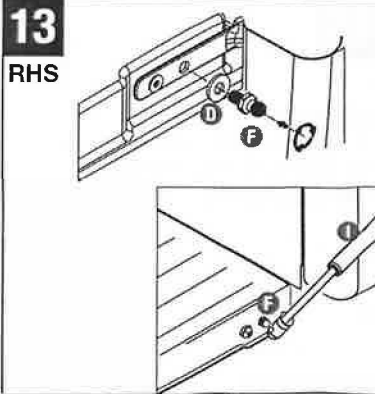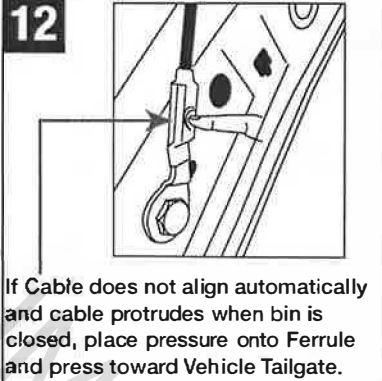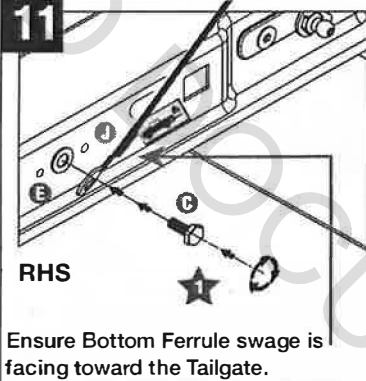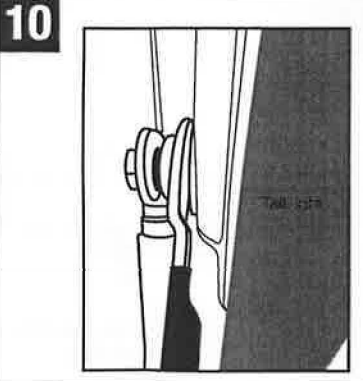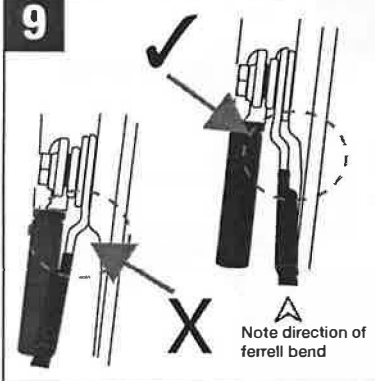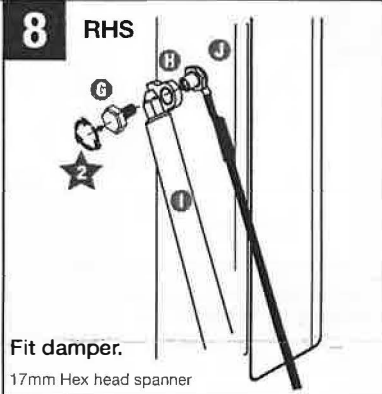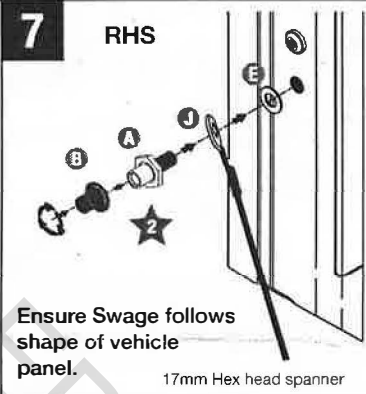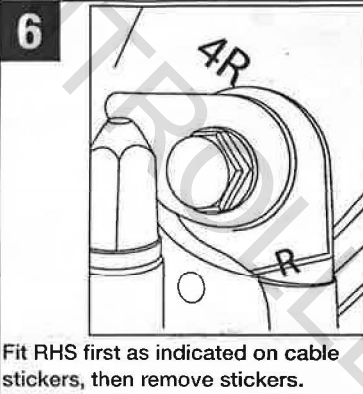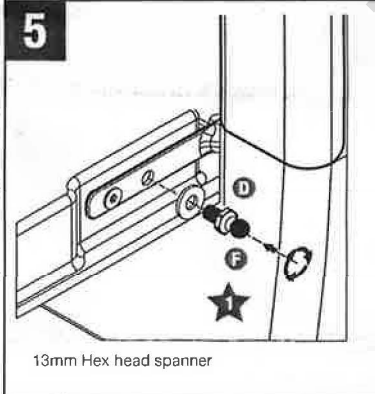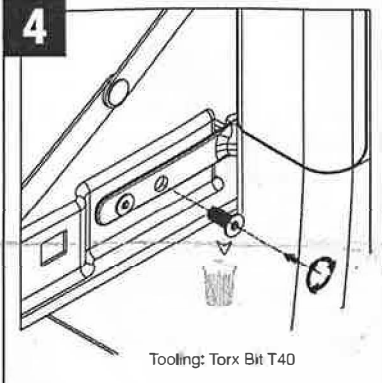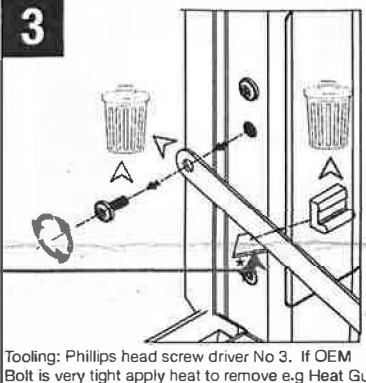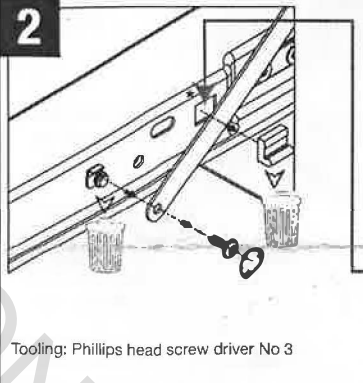

FITTING CODE	MANUFACTURER	MODEL TYPE	YEAR	STOCKIST	PRODUCT	REVISION	LABOUR	DATE	PAGE
RL0050	TOYOTA	REVO	2016 onwards	GENERAL USE	EZDOWN RELOADED	3	25min	27/08/2018	1
TORQUE - N.m		★ 27N.m±2N.m		★ 15N.m±2N.m		www.ezdown.co.za			

NB: After installation please close tailgate gently to ensure that there is no interference with any hardware.

IMPORTANT:
No liability will be incurred by Industrial Specialised Applications company, for injury, death, or property damage caused by a product which has been set up, operated, and/or installed contrary to EZDown installation guide/manual, or which has been subjected to misuse, negligence, or accident, or which has been repaired or altered by anyone other than Industrial Specialised Applications, or which has been used in a manner or for a purpose for which the product was not designed.








10mm spanner



17mm spanner

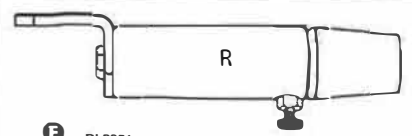

F RL0051

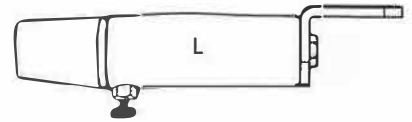

EZDown Reloaded Instruction
- 2nd Fitment


EZDown Reloaded Hilux RL0050

1
Right Hand Side (RHS) and Left Hand Side (LHS) are determined when sitting in the Drivers side of the Vehicle.


CAUTION:
Do not remove the red bolt from cylinder E until fully installed - if you do you will loose the pre-tention.




2
Open tailgate.
See slide 4 & 5 for area where nut G needs to be fitted.

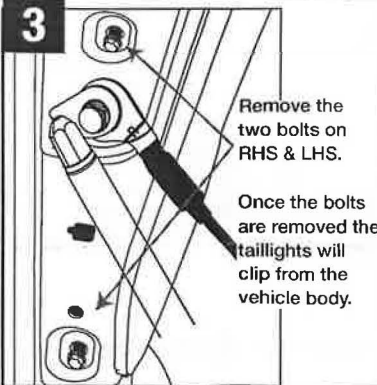


3
Remove the two bolts on RHS & LHS.
Once the bolts are removed the taillights will clip from the vehicle body.

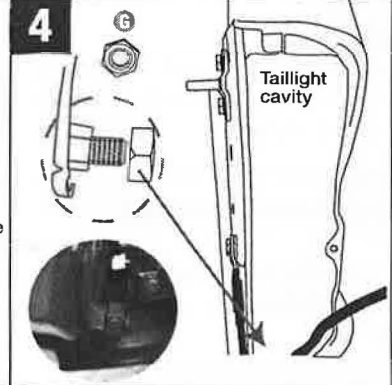


4
Taillight cavity



5
At the bottom install the locking nut G supplied onto the existing bolt. See slide 4. Repeat for LHS.

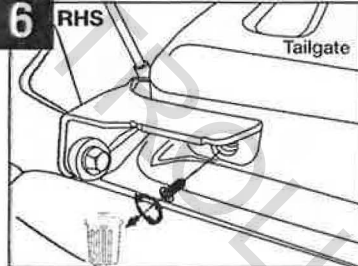


6 RHS
Tailgate
NB: View direction from inside the Vehicle Bin looking towards the Tailgate
Remove the bolt on the bracket and throw away.

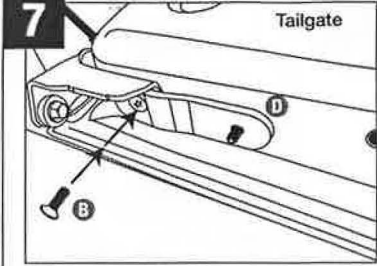


7 Tailgate
NB: View from inside vehicle looking out.
Insert bracket and fasten M8 capscrew


8
Repeat slides 2 to 7 on LHS.

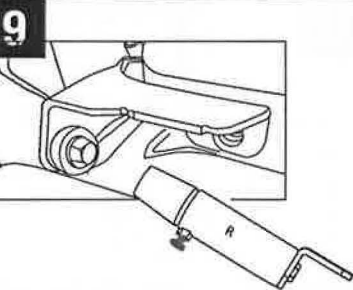


9
RHS - Fit Cylinder in position shown by sliding over end bolt and will lock in this position - see slide 10

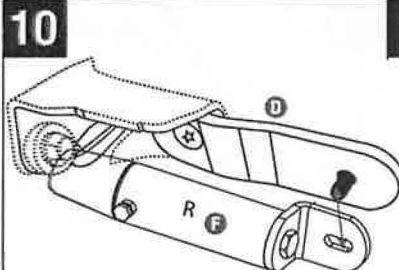


10
Cylinder slides over the bolt on the bracket and then over the stud D.
Ensure cylindrical locks flush onto the nut.

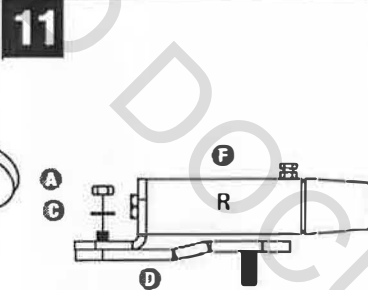


11
Fix washer and M6 Nut onto stud and fasten when tailgate is still open.

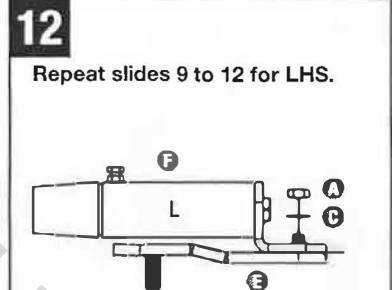


12
Repeat slides 9 to 12 for LHS.



13
REMOVE RED BOLT ON BOTH RHS AND LHS.

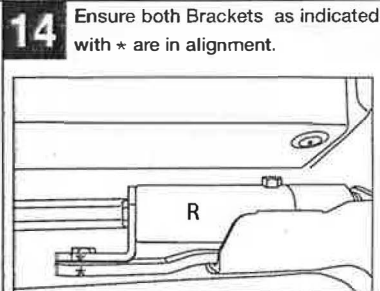

14 Ensure both Brackets as indicated with * are in alignment.

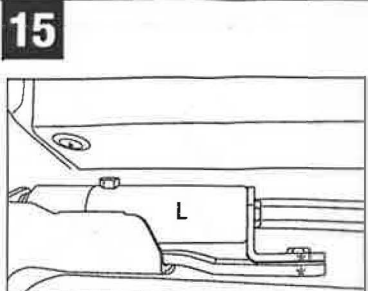

15
This is what it will look like on the inside when correctly installed.

16
NOTE:
Tailgate will fall very slowly the first cycle in order for the Reloaded to set.
SHOULD YOU WANT TO INCREASE YOUR PRELOAD OR REINSTALL YOUR PRELOAD PLEASE RETURN TO YOUR CLOSEST STOCKIST FOR ASSISTANCE

FITTING CODE	MANUFACTURER	MODEL TYPE	YEAR	STOCKIST	PRODUCT	REVISION	LABOUR	DATE	PAGE
RL0050	HILUX	REVO	2016 onwards	GENERAL USE	EZDown RELOADED	6	25min	27/08/2018	1
TORQUE - N.m	★ 27N.m±2N.m			★ 15N.m±2N.m		www.ezdown.co.za			

NB: After installation please close tailgate gently to ensure that there is no interference with any hardware.

IMPORTANT:
No liability will be incurred by Industrial Specialised Applications, or its agents, for injury, death, or property damage caused by a product which has been set up, operated, and/or installed contrary to EZDown installation guide/manual, or which has been subjected to misuse, negligence, or accident, or which has been repaired or altered by anyone other than Industrial Specialised Applications, or which has been used in a manner or for a purpose for which the product was not designed.

