

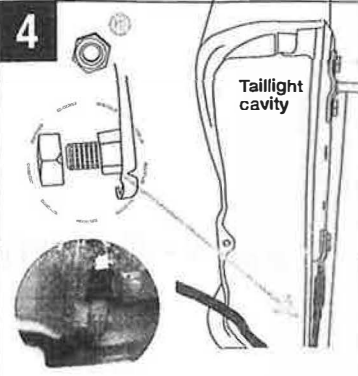


**EZDown Reloaded Instruction
- 2nd Fitment**

EZDown Reloaded VW Amarok - RL0800


1
Right Hand Side (RHS) and Left Hand Side (LHS) are determined when sitting in the Drivers side of the Vehicle.

CAUTION:
Do not remove the red belt from cylinder E until fully installed - if you do you will lose the pre-tension.

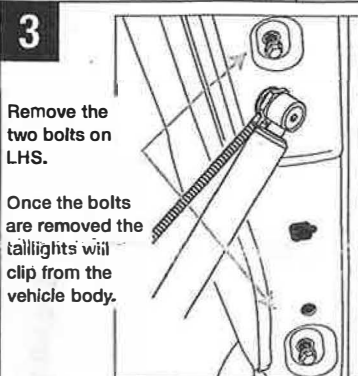


At the bottom install the locking nut F supplied onto the existing bolt. See slide 4.

Replace taillight and bolts.




NB: View direction from inside the Vehicle in looking towards the Tailgate
Remove the bolt on the bracket and throw away.

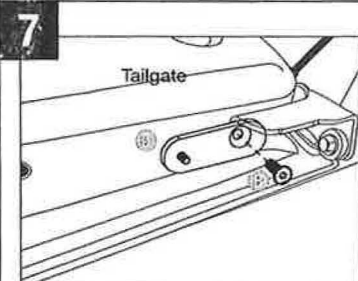


NB: View from inside vehicle looking out.
Insert bracket and fasten M8 cap screw

8


Note this is only fitted to LHS.

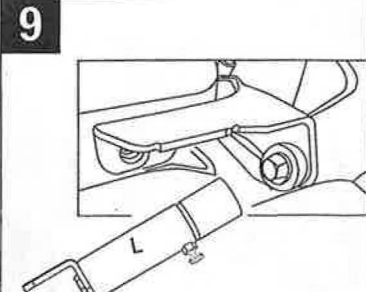


Fit Cylinder in position shown by sliding over end bolt and will lock in this position - see slide 10

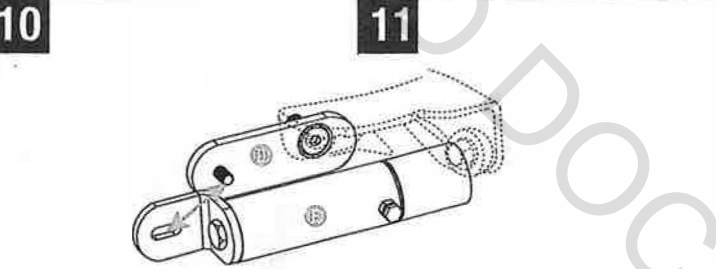


Cylinder slides over the bolt on the bracket and then over the stud D.
Ensure cylindrical locks flush onto the nut.

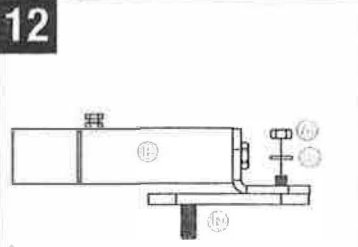

Fix washer and M6 Nut onto stud and fasten when tailgate is still open.

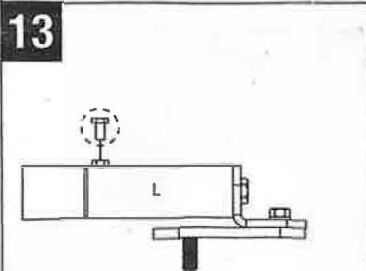


REMOVE RED BOLT.



Ensure both Brackets as indicated with * are in alignment.

This is what it will look like on the inside when correctly installed.

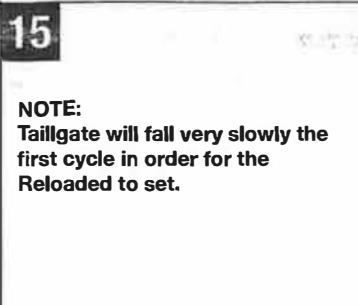

NOTE:
Tailgate will fall very slowly the first cycle in order for the Reloaded to set.

16



SHOULD YOU WANT TO INCREASE YOUR PRELOAD OR REINSTALL YOUR PRELOAD IF REMOVED FROM THE VEHICLE PLEASE RETURN BOTH POD CYLINDERS (ITEM E) TO YOUR CLOSEST STOCKIST FOR ASSISTANCE

FITTING CODE	MANUFACTURER	MODEL TYPE	YEAR	STOCKIST	PRODUCT	REVISION	LABOUR	DATE	PAGE
RL0800	VOLKSWAGEN	AMAROK	2016 onwards	GENERAL USE	EZDown RELOADED	3	25min	22/08/2018	1
TORQUE - N.m	★ 27N.m±2N.m			★ 15N.m±2N.m		www.ezdown.co.za			

NB: After installation please close tailgate gently to ensure that there is no interference with any hardware.


IMPORTANT:
No liability will be incurred by Industrial Specialised Applications company, for injury, death, or property damage caused by a product which has been set up, operated, and/or installed contrary to EZDown installation guide/manual, or which has been subjected to misuse, negligence, or accident, or which has been repaired or altered by anyone other than Industrial Specialised Applications, or which has been used in a manner or for a purpose for which the product was not designed.



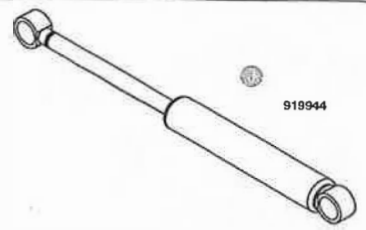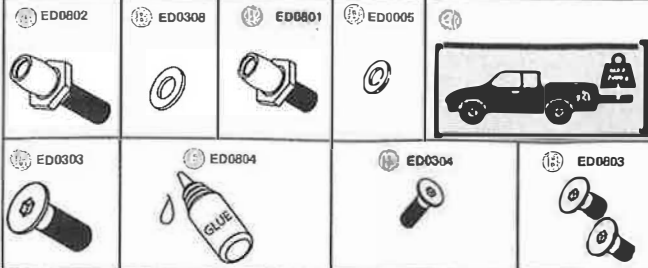

**EZDown Reloaded Instruction
- 1st Fitment**

EZDown Reloaded VW Amarok - RL0800

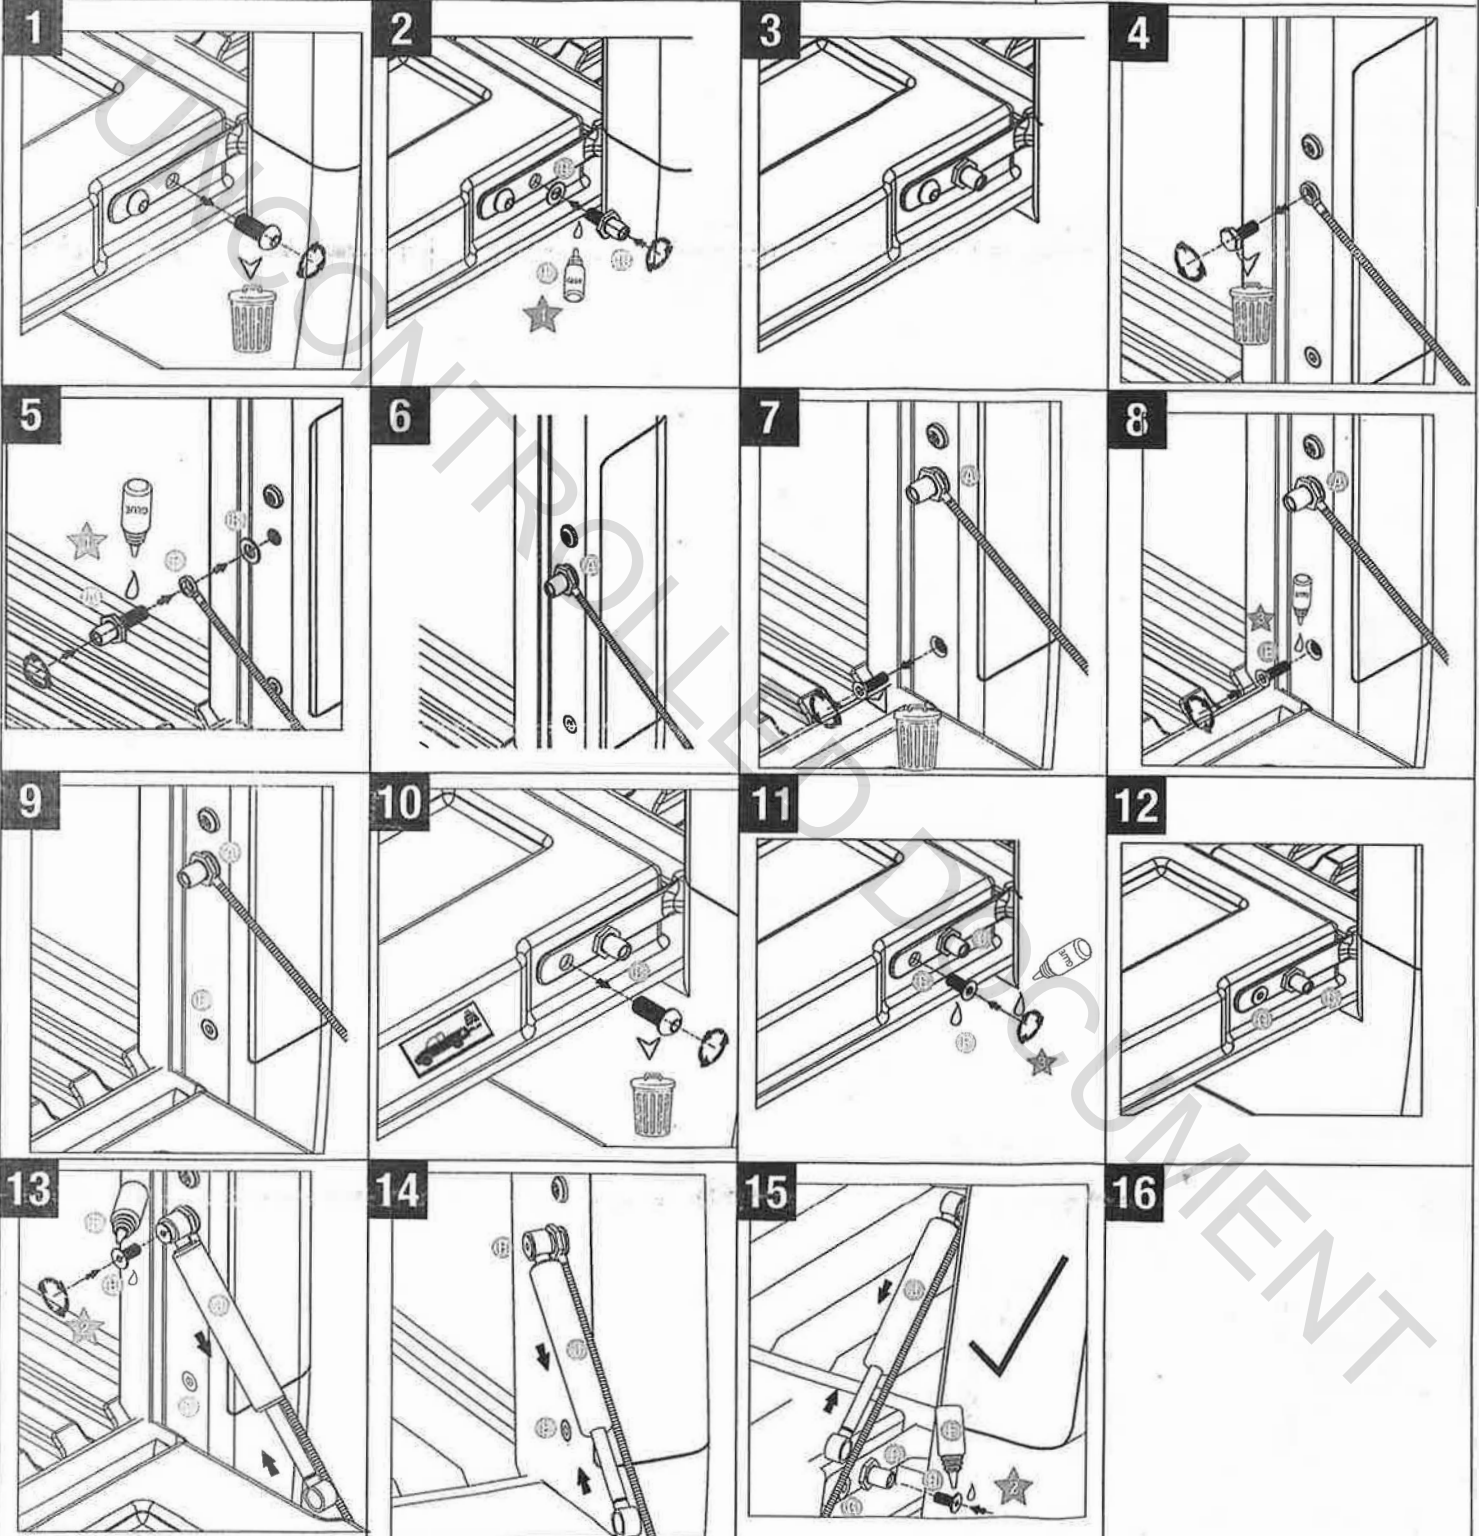

FITTING CODE	MANUFACTURER	MODEL TYPE	YEAR	STOCKIST	PRODUCT	REVISION	LABOUR	DATE	PAGE
RL0800	VOLKSWAGEN	AMAROK	2013 onwards	GENERAL USE	EZDown RELOADED	1	20min	19/03/2018	1
TORQUE - N.m	★ 27N.m±2N.m	★ 15N.m±2N.m	★ 17N.m±2N.m	www.ezdown.co.za					

NB: After installation please close tailgate gently to ensure that there is no interference with any hardware.

IMPORTANT:

No liability will be incurred by Industrial Specialised Applications company, for injury, death, or property damage caused by a product which has been set up, operated, and/or installed contrary to EZDown installation guide/manual, or which has been subjected to misuse, negligence, or accident, or which has been repaired or altered by anyone other than Industrial Specialised Applications, or which has been used in a manner or for a purpose for which the product was not designed.

